

(Unit:mm)



■ Features :

- Economical open frame design
- Wide input range
- High efficiency up to 97%
- Remote ON / OFF control
- Compact size 2.0"×1.024"× 0.433" (SIP package)
- Protections: Short circuit / Overload / Over voltage
- -30~+85°C wide working temperature
- Cooling by free air convection
- Comply to BS EN/EN55032 ClassA without additional components
- Trimming output (optional)
- 3 years warranty

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


SPECIFICATION



ORDER NO.		NID65-5	NID65-12	NID65-15	NID65-24	
OUTPUT	DC VOLTAGE		5V	12V	15V	24V
	CURRENT RANGE		0 ~ 6.5A	0 ~ 4.9A	0 ~ 4.3A	0 ~ 2.7A
	RATED POWER		32.5W	58.8W	64.5W	64.8W
	RIPPLE & NOISE (max.) Note.2		100mVp-p	120mVp-p	150mVp-p	200mVp-p
	LINE REGULATION	Note.3 ±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION	Note.4 ±0.5%	±0.5%	±0.5%	±0.5%	
	VOLTAGE TOLERANCE		±2.0%	±2.0%	±2.0%	±2.0%
	SWITCHING FREQUENCY (Typ.)		200KHz			
EXTERNAL CAPACITANCE LOAD (max.)		100uF / 16V low ESR	68uf/25V low ESR	47uf/50V low ESR	47uf/50V low ESR	
INPUT	VOLTAGE RANGE		10.5 ~ 53VDC	20 ~ 53VDC	20 ~ 53VDC	30 ~ 53VDC
	NORMAL VOLTAGE		24VDC (or 12VDC or 48VDC)	24VDC (or 48VDC)	24VDC (or 48VDC)	48VDC
	EFFICIENCY (Typ.)	24Vin	93% (12/24VDC)	96%	97%	-----
		48Vin	92%	95%	95%	96%
	DC CURRENT	Full load	3200mA/12VDC	2700mA/24VDC	3000mA/24VDC	1500mA/48VDC
		No load	20mA	30mA	30mA	50mA
PROTECTION		Fuse recommended (5A)				
PROTECTION	OVERLOAD (Typ.)		120 ~ 250% rated output power			
			Protection type : Hiccup mode, recovers automatically after fault condition is removed			
	OVER VOLTAGE		6.4 ~ 7.5V	15.6~ 18V	17.5~ 21V	28~ 33V
			Protection type : Shut off o/p voltage, clamp by TVS diode			
	SHORT CIRCUIT		All output equipped with short circuit			
Protection type : Hiccup mode, recovers automatically after fault condition is removed						
FUNCTION	REMOTE CONTROL	Power on : 1.2VDC < R.C ~ com < 12VDC or open circuit ; power off : R.C ~ com < 0.4VDC or short circuit (PIN5,6 & PIN11)				
ENVIRONMENT	SAFETY STANDARDS		EAC TP TC 004 approved			
	WORKING TEMP.		-30 ~ +85℃ (Refer to "Derating Curve")			
	WORKING HUMIDITY		20% ~ 85% RH non-condensing			
	STORAGE TEMP.		-30 ~ +105℃			
	TEMP. COEFFICIENT		±0.03% / °C (0 ~ 55℃)			
	VIBRATION		10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes			
SAFETY & EMC	SAFETY STANDARD		BS EN/EN62368-1(LVD)			
	EMC EMISSION	Parameter	Standard	Test Level / Note		
		Conducted	BS EN/EN55032	Class A without external components,Class B with external components		
		Radiated	BS EN/EN55032	Class A without external components,Class B with external components		
	EMC IMMUNITY	BS EN/EN55035				
		Parameter	Standard	Test Level / Note		
		Radiated	BS EN/EN61000-4-3	Level 2, 3V/m ; criteria A		
		EFT / Burst	BS EN/EN61000-4-4	Level 2, 1KV ; criteria A		
		Surge	BS EN/EN61000-4-5	Level 2, 1KV/Line-Line,criteria A		
		Conducted	BS EN/EN61000-4-6	Level 2, 3V ; criteria A		
OTHERS		MTBF	16602.6K hrs min. Telcordia SR-332 (Bellcore) ; 890.7K hrs min. MIL-HDBK-217F (25℃)			
	DIMENSION	50.8*26*11mm or 2.0**1.024**0.433" inch (L*W*H)				
	WEIGHT	19g;280psc/6.32Kg/0.94CUFT				
NOTE	1.All parameters are specified at normal input, rated load, 25℃ 70% RH Ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					


■ Connection diagram to obtain negative output voltage

Note: input voltage must be $< 30\text{VDC}$.

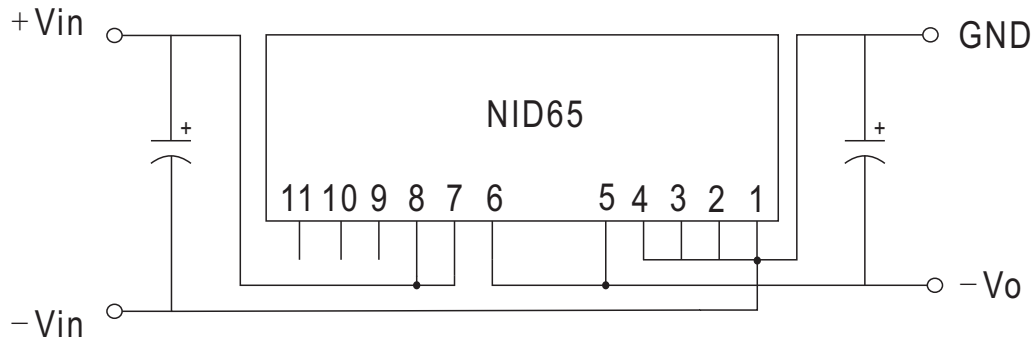


■ Derating Curve


NID65-5V

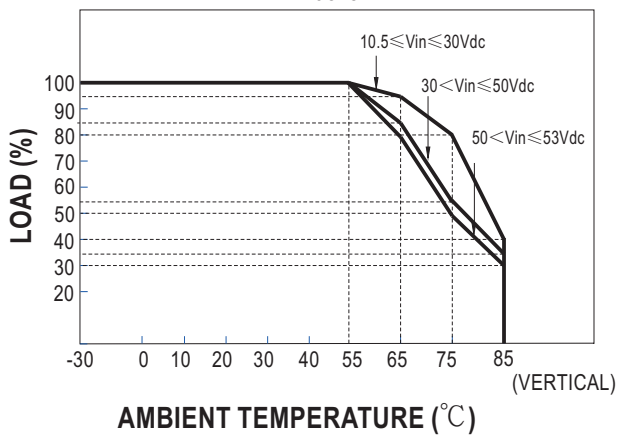

NID65-12V,15V

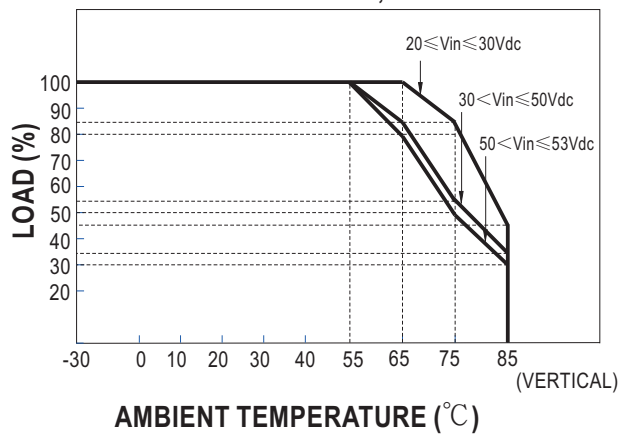


NID65-24V

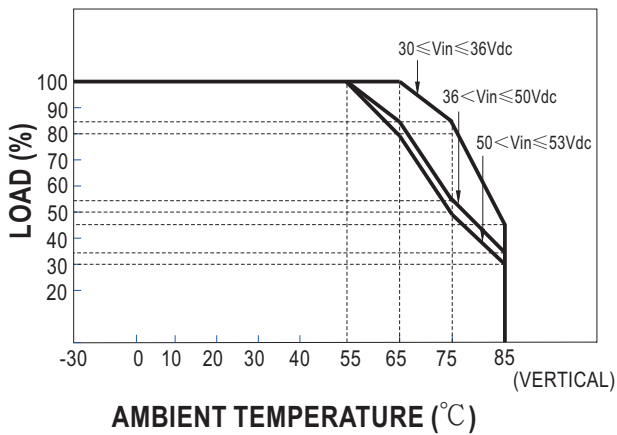

Mechanical Specification

(Unit:mm[inch], Tolerance:±1[±0.04])

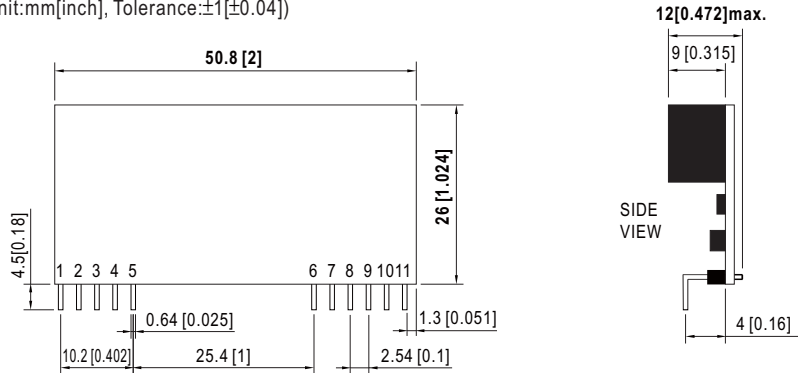


Pin Configuration

Pin No.	Pin_Out
1,2,3,4	+Vout
5,6	Com
7,8	+Vin
9	N.C.
10	Trim(optional)
11	R.C.

EMC Suggestion Circuit

※Comply to EN55032 Class A without additional componenets ,required external componenets to meet Class B emissssion are as below:

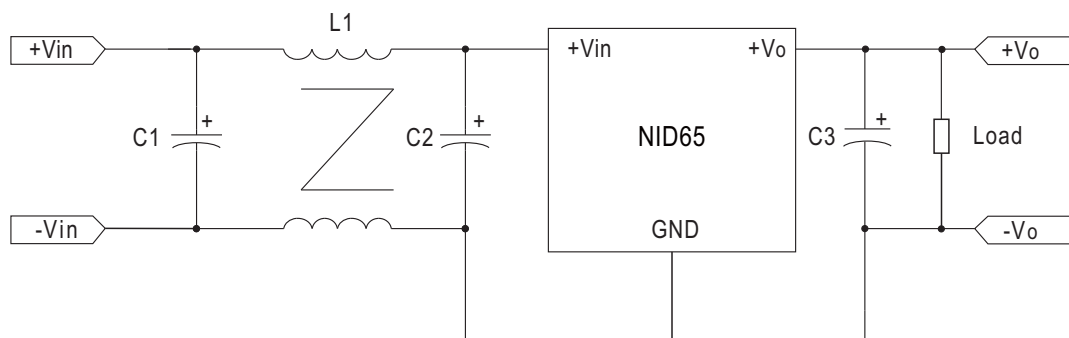

C1/C2	L1	C3
120 μ F/63V	15 μ H(NiZn)	22 μ F/35V